


GM62V60 (PEG600DA)

GM62V60 為聚乙二醇(A600)二丙烯酸酯。
用途以油墨、塗料、黏著劑以及光阻劑為主。

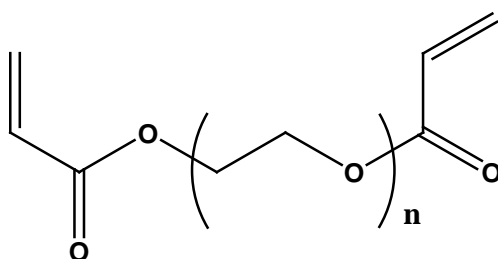

特 性

1. 低氣味、低揮發性、高反應性、親水性高。
2. 柔韌性佳、稀釋性佳、高密著。

用 途

1. 油墨、塗料。
2. 黏著劑。
3. 光阻劑。

GM62V60-1/2
Nov., 01, 2015

The information of this product is given in good faith and believed to be reliable. The properties are illustrative only, and are not to be regarded as specifications. The information and/or suggestions are made without warranty since the conditions of the use are beyond our control. Nothing herein shall be construed as a recommendation to use any product in conflict with patents or extending any license under any patents. Buyer must determine the suitability of this product for the intended uses and applications.

一般性質

外觀	澄清透明
色數, APHA, 25°C	100 max.
酸價, mg KOH/g	0.1 max.
含水率, (%)	0.2 max.
黏度, cps, Brookfield, 25°C	80 ~ 120
比重, g/cm ³ , 25°C	1.11 ~ 1.13
抑制劑含量, ppm	400 ~ 600
甲苯含量, (%)	0.1 max.

貯藏安定性

樹脂請遠離火源並置放於陰暗處，以免發生危險或影響樹脂儲存安定性，常溫下存放 12 個月不變質，使用後請栓緊桶蓋以避免光源照射及凝膠結皮。

包裝容量/品名

200 kg / GM62V60-D0

GM62V60-2/2
Nov., 01, 2015

The information of this product is given in good faith and believed to be reliable. The properties are illustrative only, and are not to be regarded as specifications. The information and/or suggestions are made without warranty since the conditions of the use are beyond our control. Nothing herein shall be construed as a recommendation to use any product in conflict with patents or extending any license under any patents. Buyer must determine the suitability of this product for the intended uses and applications.