

VG7263

Technical Datasheet

高光學純度的聚乳酸樹脂經過改質(compound)，通常可以提升其製品的機械強度，達到一般石化塑膠製品的水準，VG7263是一款具有高耐衝擊特性的改性聚乳酸樹脂，可用於一般用途，VG7263的組成符合European Commission Regulation (EU) No.10/2011規範，可用於跟食物接觸的產品。應用例：牙刷。

Property	Test Method	Unit	Value	Test Method	Unit	Value
MECHANICAL						
Tensile Strength	ASTM D638	kg/cm ²	530	GB/T1040-1992	MPa	53
Tensile Modulus	ASTM D638	kg/cm ²	30000	GB/T1040-1992	GPa	3
Elongation (at break)	ASTM D638	%	15	GB/T1040-1992	%	15
Flexure Modulus	ASTM D790	kg/cm ²	43000	GB/T9341-2000	GPa	4.3
Flexure Strength	ASTM D790	kg/cm ²	850	GB/T9341-2000	MPa	85
IZOD Impact / Notched (23°C)	ASTM D256	kg-cm/cm	20	GB/T1043-1992	KJ/m ²	20
IZOD Impact / Unnotched (23°C)	ASTM D256	kg-cm/cm	NB	GB/T1043-1992	KJ/m ²	NB
IZOD Impact / Notched (-30°C)	ASTM D256	kg-cm/cm	5	GB/T1043-1992	KJ/m ²	5
IZOD Impact / Unnotched (-30°C)	ASTM D256	kg-cm/cm	NB	GB/T1043-1992	KJ/m ²	NB
THERMAL						
Heat Deflection Temperature	ASTM D648	°C	100	GB/1634-2004	°C	100
PHYSICAL						
Density				GB/T1033-1986	g/cm ³	1.27
Specific Gravity	ASTM D792	-	1.27			
Melt Flow Rate (210°C/2.16Kg)	ASTM D1238	g/10min	1	GB/T3682-2000	g/10mi	1
Hardness	ASTM D2240	Shore-D	82	GB/T2411-1980	Shore-	82

(1) Values shown are based upon specific condition. Variations within normal tolerances are possible for various colors. Actual properties of individual batches will vary within specification limits.



Reported values are only as guidelines for designers and processors of modified thermoplastics. Data are obtained from specimens molded under carefully controlled conditions from representative samples of the compound described herein. Properties may be materially affected by pellet cut, size, color, molding techniques applied, and shape of the item molded. No assurance can be implied that all molded articles will have the same properties as those listed. The values of specification listed were collected and shown to the best of our knowledge. However, we ask for understanding that we can not take over liability for the results in individual cases and for the suitability and completeness of our recommendations, and can not guarantee that no third-party patent rights are restricted. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use.



Packaging and Drying

Water contain will affect the molding process the mechanical properties of end products. The moisture level of each resin is controlled under 0.1% (1000 ppm) before packaging. Drying of before a process is necessary.

The available packages of resins are shown in the following table. Special package can supplied upon request. Each package will be attached tag which shows the product grade, the lot number, the net weight. The products will be stacked on pallet. Maximum weight of each pallet is 1,000 kg.

	25	500	750	1,000
Paper bag *1				
Aluminum foil	●			
Bulk bag *2				●
Paper box				

(1) Polyethylene laminated for interior layer.

(2) Polypropylene woven bag

Drying of crystalline PLA compounds can be performed in a desiccant hot air dryer, preferably with a dew point of less than -40°C. It is recommended to dry for 4 hours at 70°C. Insufficient drying will cause die drool, rough surface appearance, reduced output, and low mechanical properties. Streaks can be caused by overheating of the material or long time remaining in the barrel.

Storage

Please store resins indoor with room temperature. Avoid to be in touched with water, oil or solvent. Some high purity grades of must be stored under low dusty environment. The dust of package may cause contamination when it be opened.

Although resins are thermoplastic polymer, long term storage is not recommended. The normal storage warranty will be 2 years.

Product Safety

For the safety properties of the material, we refer to our SDS which can be requested from our sales offices.

During practical operation we advise to wear personal safety protections for hand, eye, and body. Caution! Handling or processing the resins may generate a dust which can cause irritation of the eye, skin, nose and throat.

Reported values are only as guidelines for designers and processors of modified thermoplastics. Data are obtained from specimens molded under carefully controlled conditions from representative samples of the compound described herein. Properties may be materially affected by pellet cut, size, color, molding techniques applied, and shape of the item molded. No assurance can be implied that all molded articles will have the same properties as those listed.


The values of specification listed were collected and shown to the best of our knowledge. However, we ask for understanding that we can not take over liability for the results in individual cases and for the suitability and completeness of our recommendations, and can not guarantee that no third-party patent rights are restricted. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use.

Regrind

Resins are thermoplastic materials. Sprues, runners or side sheets are possible to be reprocessed. The regrinds must be clean, low thermally degraded and well dried. The acceptable level of regrind depends on the application. Be aware that regrind of purify grades is not recommended for original application.

Molding Condition

Mold	Nozzle	Front	Center	Rear	Temp °C
					200
					190
					180
					170
					160
					90
					80

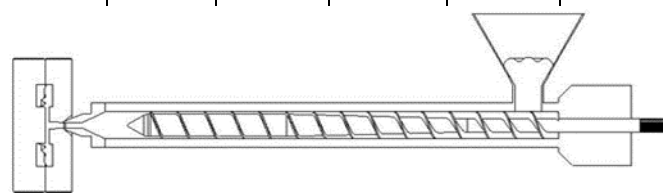

The recommendations and data given are based on our experience to date, however, no liability can be assumed in connection with their usage and processing.

For Additional Information

Customer service

liu@uniwin-chem.com.tw

+ (886) 2336-2202